

FAE

UML/S/DT - 225

PTO TRACTOR MOUNTED MULCHER

PTO tractor mounted mulcher with fixed teeth rotor for tractors between 130 - 190hp




FEATURES

STANDARD EQUIPMENT ON NZ MODELS

Adjustable skids	Bolted dual row protection chains
Interchangeable counter blade	Centralised greasing hub
Hydraulic toplink	
Z style alignment for gearbox	
Hydraulic pushframe	
Hydraulic rear hood	

FACTORY OPTIONS FOR INDENT ORDERS ONLY

Mechanical pushframe
Multiple tooth options

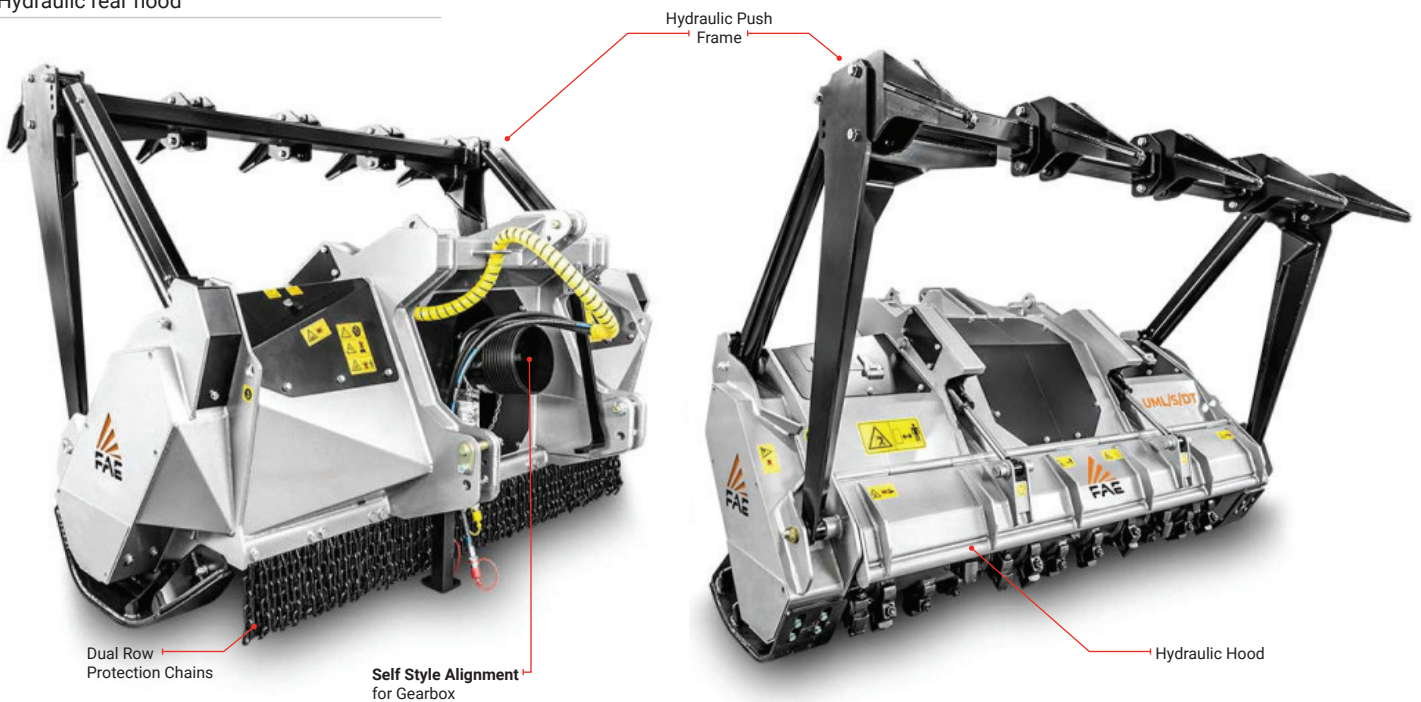

PTO rpm	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding (mm)	No. teeth type C/3+C/355
1000	2310	2670	1825	250	48 + 2

ATTACHMENTS

ACTIVEVMA.CO.NZ

3-7 McCloskey Road, Rotorua 3015, New Zealand
07 345 5609 admin@activevma.co.nz

