

PML/EX 100

MULCHER WITH FLAIL ROTOR FOR EXCAVATORS

Weight between 5.5 - 7.5 tonne



FEATURES


STANDARD EQUIPMENT ON NZ MODELS

Customised attachment bracket	Belt transmission
Hydraulic hoses	27cc gear motor with integrated anti-cavitation valve
Rear roller	Anti-dust machine body with enclosed motor
Welded counter blade	Flow control system valve
Rear hood with mechanical adjustment	2 hose N&B circuit compatible

OPTIONS

'Hitch n Heel' excavator attachment
17/34cc variable manual displacement hydraulic piston motor with relief and anti-cavitation valve (case drain circuit required)
Custom factory builds upon request

Flail
PML

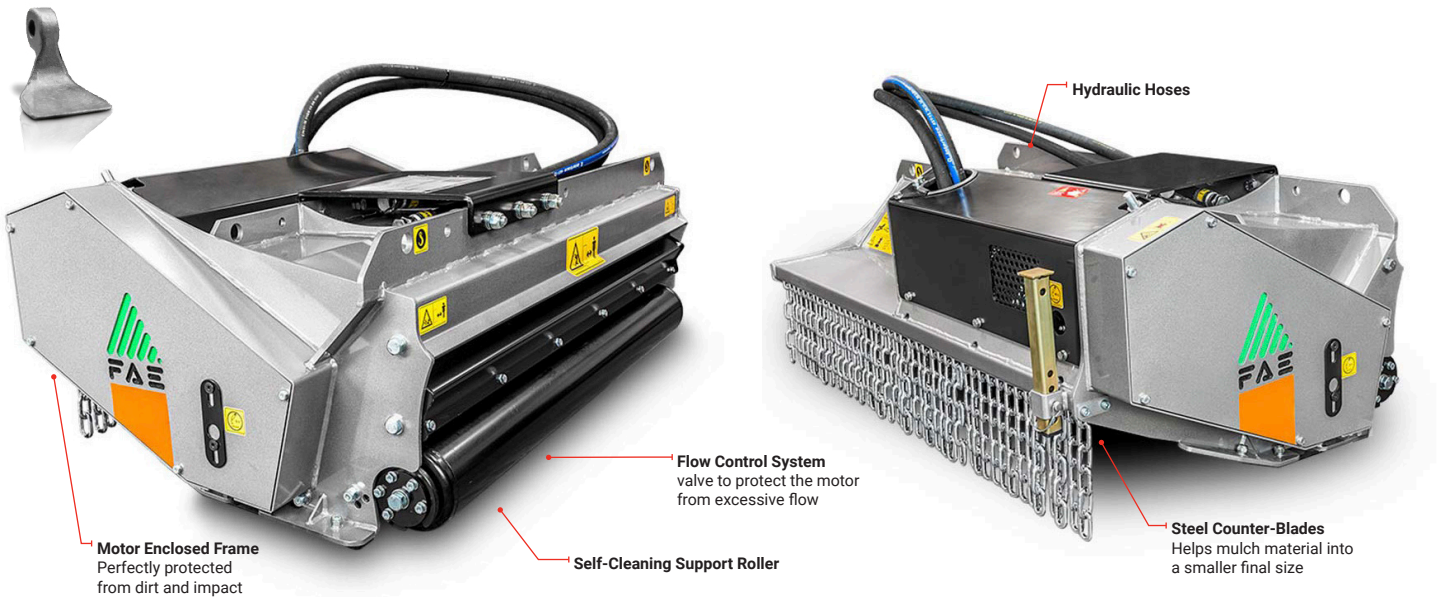

Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. of flails PML
min	max	min	max	min	max				
55	85	180	210	5.5	7.5	1015	290	50	16

Data refers to machine without options

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch'
Hydraulic Hoses (factory supplied at fixed length)
Delivery, Custom Hydraulic Motor Setting and Commissioning

