

PMM/HY 100

MULCHER WITH FLAIL ROTOR FOR EXCAVATORS

Weight between 3.5 - 5.5 tonne



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

Customised attachment bracket

Hydraulic Hoses

Rear roller

Welded counter blade

Belt transmission

16cc gear motor with integrated anticavitation valve

Anti-dust machine body with enclosed motor


Flow control system valve

2 hose N&B circuit compatible

Rear rubber flap

Custom factory builds upon request

Flail
PML

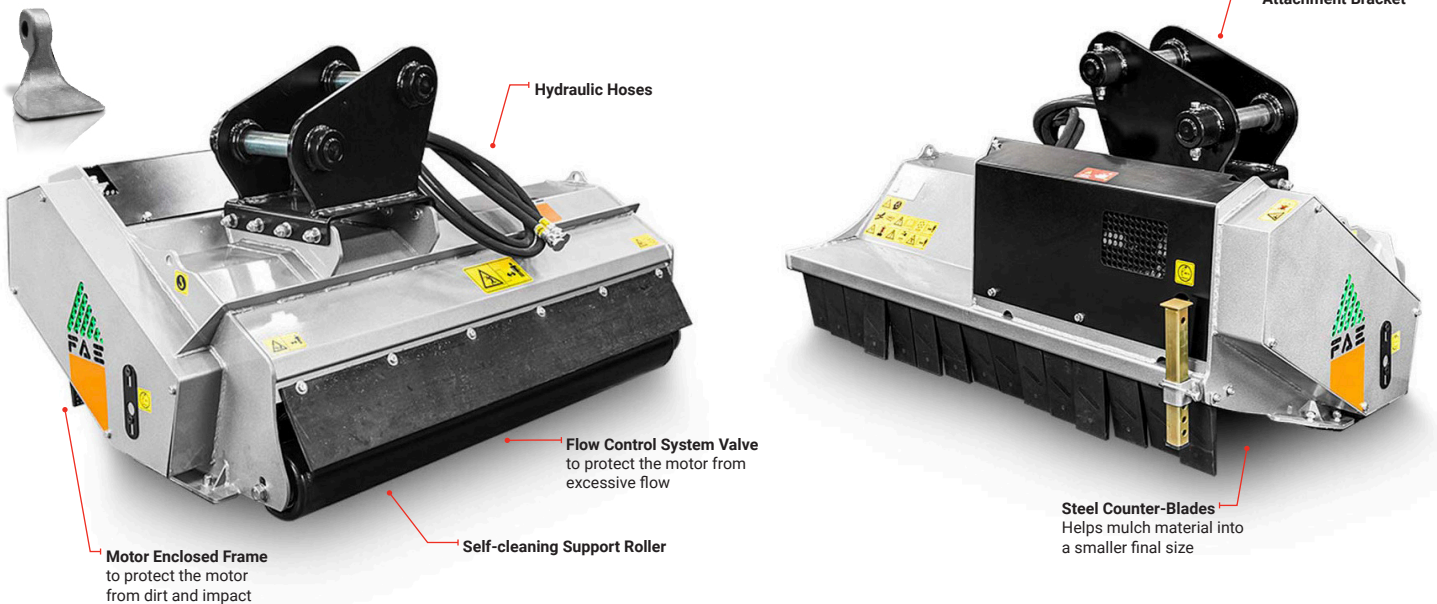

Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. of flails PML
min	max	min	max	min	max				
35	75	150	210	3.5	5.5	980	150	36	16

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch'

Hydraulic Hoses (factory supplied at fixed length)

Delivery, Custom Hydraulic Motor Setting and Commissioning

