

RSL 150

PTO TRACTOR MOUNTED ROAD STABILISER/ROCK CRUSHER

Stone crusher with a maximum working depth of 28cm for tractors between 100 and 130 hp.



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

Hydraulic adjustable skids	Oversized rotor bearings
PTO shaft, walterscheid W2500, high performance power drive with torque limiter	Forged tool holders made of heat treated steel
Inner bolted HARDOX® plates for a complete anti-wear protection	Rear hydraulic protection/dozing hood with adjustable screening grid
HARDOX® Breaker bar	Bolted forged rotor axles
Double steel cage system – machine shell (WELDOX® steel)	One side gearbox transmission (540 rpm)
	Rotor G/3/R44 + R65 SD

OPTIONS

Hydraulic top link, with lock valves
Active VMA side shift unit
Water injection system and nozzles
Tooth type G/3

Tooth
G/3/R44



Tooth
R65 SD




Motor enclosed frame perfectly protected from dirt and impact

Hydraulic rear hood with screening grill



PTO driveshaft with cam clutch

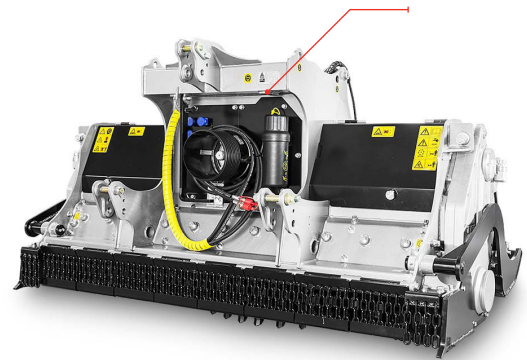

RSL 150 Road Stabiliser Tractor Attachment	PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max. shredding diameter (mm)	Max. working depth (mm)	No. teeth type
	540	1480	1915	2000	300	150-280	G/3/R44 + R65 SD 44 + 14

Data refers to machine without options