

SCL/HY

DISC STUMP CUTTER FOR EXCAVATORS.


Weight between 4 - 7.5 tonne



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

Hydraulic front hood	Hydraulic rear hood
Flow control valve	32/65cc variable manual
Motor integrated into frame	Hydraulic piston motor
Belt transmission	Front fixed thumb bracket
Diverter valve (plug & play)	Screwed protection chains

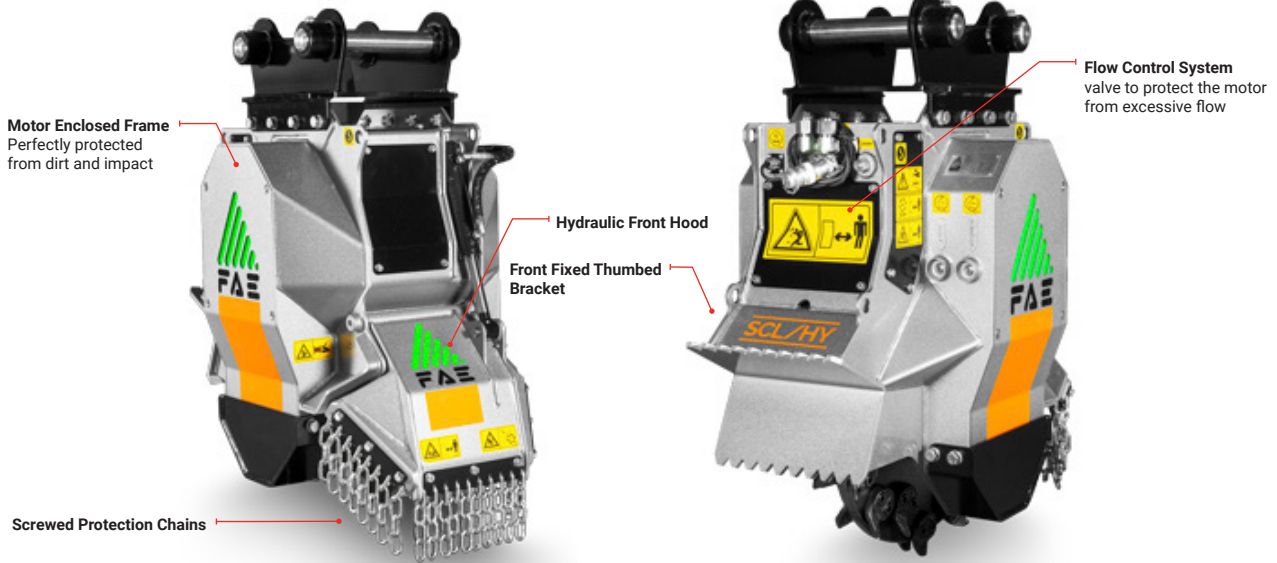

Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Rotor diameter (mm)	Total width (mm)	Weight (kg)	No. of teeth (L1/L2)
min	max	min	max	min	max				
50	100	180	350	4	7.5	570	600	460	15+15

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

- Active VMA 'Hitch'
- Delivery, Custom Hydraulic Motor Setting and Commissioning

