

# SCM/EX/VT

## DISC STUMP CUTTER FOR EXCAVATORS

Weight between 12 - 20 tonne

\*Up to 30 tonne when coupled with 'Hitch n Heel'




### FEATURES

#### STANDARD EQUIPMENT ON NZ MODELS

'Hitch n Heel' excavator attachment	160/115cc variable torque hydraulic piston motor
Flow control valve	Screwed protection chains
Hydraulic front hood	Anti-dust machine body with enclosed motor
Motor integrated into the frame	Adjustable supporting service stand
Belt transmission	

#### OPTIONS


Diverter valve
Standard hitch
Factory thumb
Custom factory builds upon request

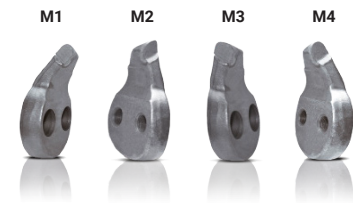

**Motor Enclosed Frame**  
Perfectly protected from dirt and impact

**Optional Factory Thumb**

**Adjustable Supporting Service Stand**  
For storing the machine when not in use

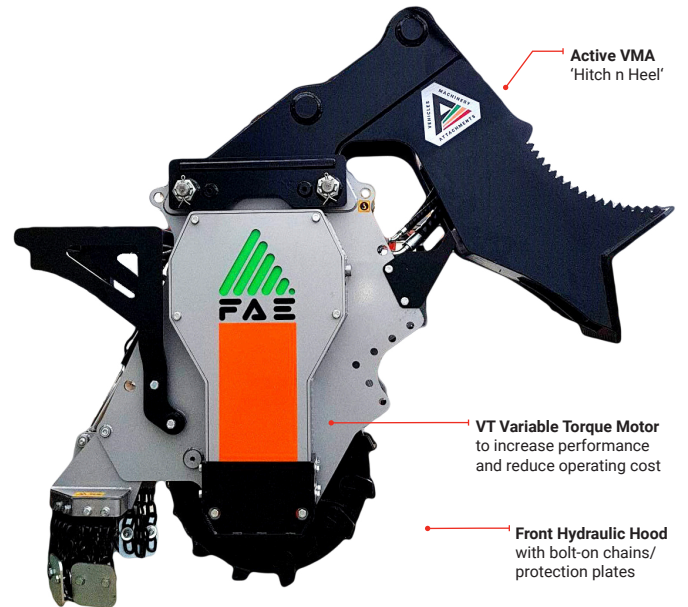

**Active VMA 'Hitch n Heel'**

**VT Variable Torque Motor**  
to increase performance and reduce operating cost

**Front Hydraulic Hood**  
with bolt-on chains/ protection plates

Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Rotor diameter (mm)	Total width (mm)	Weight (kg)	No. of teeth (M1/M2/M3/M4)
min	max	min	max	min	max				
120	220	220	350	14	30*	790	770	1020	12+3+12+3

Data refers to machine without options

#### STANDARD STUMP CUTTER PACKAGE INCLUDES

Active VMA 'Hitch n Heel'
Hydraulic Hose Kit (2x1", 2x3/8", 1x1/2")
Delivery, Custom Hydraulic Motor Setting and Commissioning

