

UML/EX/VT 150

MULCHER WITH FIXED TEETH ROTOR FOR EXCAVATORS

Weight between 14 - 20 tonne

*Up to 30 tonne when coupled with 'Hitch n Heel'



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

'Hitch n Heel' excavator attachment

Anti-dust machine body with enclosed motor

Hydraulic hood with enclosed drive

Welded counter blade

Bolted dual row protection chains

110/60cc variable torque hydraulic piston motor

Polychain belt transmission

Hydraulic valve with flow control, anti-cavitation and relief functions

OPTIONS

Electric hood control valve

Multiple tooth options

Standard hitch

Custom factory builds upon request

C/3
Standard Tooth


C/3/SS
Side Scraper Tooth



Motor Enclosed Frame
Perfectly protected from dirt and impact

Steel Counter-Blades
Helps mulch material into a smaller final size

Anti-Dust Rear Door
revolutionary system for door opening/closing that prevents dirt from entering into the service areas of the machine

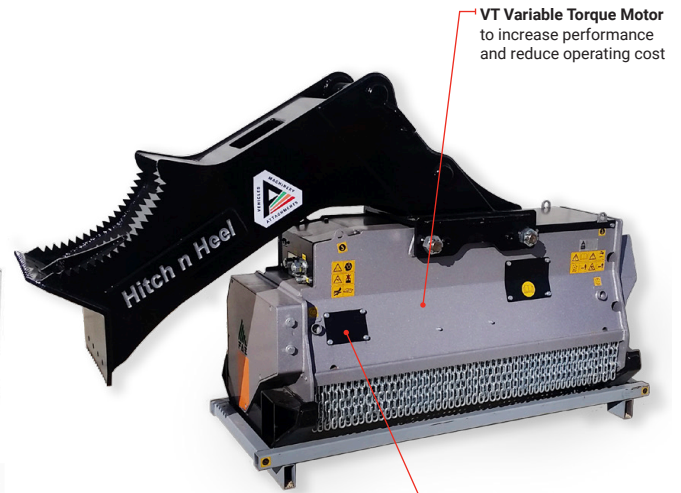

VT Variable Torque Motor
to increase performance and reduce operating cost

Flow Control System
valve to protect the motor from excessive flow

Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. of teeth (C/3+C/3/SS)
min	max	min	max	min	max				
150	200	250	350	14	30*	1580	1240	200	32+2

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch n Heel'

Hydraulic Hose Kit (2x1", 2x3/8", 1x1/2")

Delivery, Custom Hydraulic Motor Setting and Commissioning

