


# UML/HY/VT 125

## MULCHER WITH FIXED TEETH ROTOR FOR EXCAVATORS

Excavator weight between 12 - 16 tonne

\*Up to 23 tonne when coupled with 'Hitch n Heel'

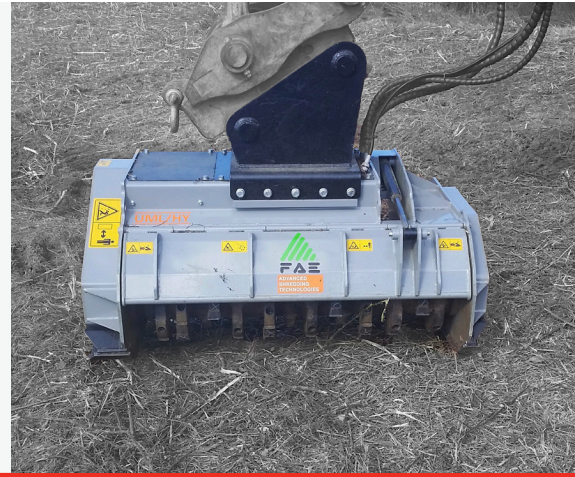

### FEATURES

#### STANDARD EQUIPMENT ON NZ MODELS

'Hitch n Heel' excavator attachment

Anti-dust machine body with enclosed motor

Hydraulic hood with enclosed drive

Welded counter blade

Bolted dual row protection chains

80/50cc variable torque hydraulic piston motor

Polychain belt transmission

Hydraulic valve with flow control, anti-cavitation and relief functions

#### OPTIONS

Electric hood control valve

Multiple tooth options

Standard hitch

Custom factory builds upon request

C/3  
Standard Tooth

C/3/SS  
Side Scraper Tooth




**Motor Enclosed Frame**  
Perfectly protected from dirt and impact

**Flow Control System**  
valve to protect the motor from excessive flow

**Steel Counter-Blades**  
Helps mulch material into a smaller final size



**VT Variable Torque Motor**  
Adjustable motor to obtain the maximum performance from any excavator

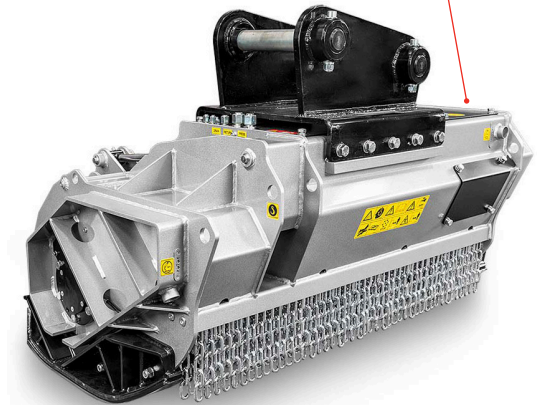

Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. of teeth (C/3+C/3/SS)
min	max	min	max	min	max				
120	160	250	350	12	23*	1340	970	1020	26+2

Data refers to machine without options

#### STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch n Heel'

Hydraulic Hose Kit (2x1", 2x3/4", 1x1/2")

Delivery, Custom Hydraulic Motor Setting and Commissioning

